

PANEL MOUNTED GAS, AIR OR VACUUM DOUBLE NOZZLE (GAV-P-DN)

FEATURES:


- Straight Serrated Nozzle
- Metal Lever Handle with air, gas and vac service buttons
- Service: Natural Gas, Air or Vacuum
- Y Pattern Flange
- Solid Brass Valve Construction
- Fully Assembled and Tested


PERFORMANCE SPECIFICATIONS

- Rated Operating Pressure: 20-125 PSI
- Rated Operating Temperature: 40-140° F

COMPLIANT TO:

- ANSI Z21.5a
- CGA 9.1M

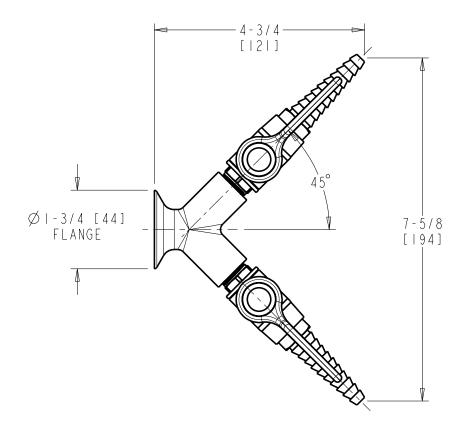

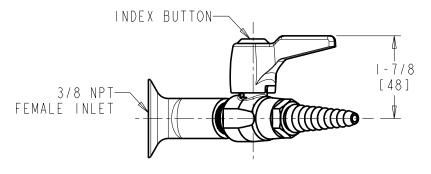

PS - GAV-P-DN - v.1.0